

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Assistant Commissioner for Patents
 United States Patent and Trademark
 Office
 Box PCT
 Washington, D.C. 20231
 ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 06 September 2000 (06.09.00)	
International application No. PCT/US99/27928	Applicant's or agent's file reference TOKYO23PCT
International filing date (day/month/year) 10 December 1999 (10.12.99)	Priority date (day/month/year) 30 December 1998 (30.12.98)
Applicant JOHNSON, Wayne, L.	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

27 July 2000 (27.07.00)

☐ in a notice effecting later election filed with the International Bureau on:
2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Claudio Borton Telephone No.: (41-22) 338.83.38
--	---

PCT

INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C23C 16/00, H01L 21/26, 21/42	A1	(11) International Publication Number: WO 00/40771 (43) International Publication Date: 13 July 2000 (13.07.00)
(21) International Application Number: PCT/US99/27928 (22) International Filing Date: 10 December 1999 (10.12.99) (30) Priority Data: 60/114,454 30 December 1998 (30.12.98) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/114,454 (CON) Filed on 30 December 1998 (30.12.98) (71) Applicant (for all designated States except US): TOKYO ELECTRON LIMITED [JP/JP]; TBS Broadcast Center, 3-6, Akasaka 5-chome, Minato-ku, Tokyo 107 (JP). (72) Inventor; and (75) Inventor/Applicant (for US only): JOHNSON, Wayne, L. [US/US]; 13658 South 32nd Street, Phoenix, AZ 85044 (US). (74) Agents: FINKELSTEIN, Jay, M. et al.; Pillsbury Madison & Sutro LLP, 1100 New York Avenue, N.W., Washington, DC 20005 (US).		(81) Designated States: CN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: LARGE AREA PLASMA SOURCE (57) Abstract <p>A chamber housing (2) enclosing a plasma region (10) in a large area plasma source used for performing plasma assisted processes in large area substrates, the chamber housing (2) being composed of: a housing member (2) constituting a substantially vertically extending wall (4) surrounding a space (6) corresponding to the plasma region (10), the housing member (2) having a plurality of openings (32), and electrically conductive elements forming an electrostatic shield around the space; a plurality of dielectric members (36) each having a peripheral edge and each disposed to close a respective opening (32); and sealing members (40, 40', 42, 42') forming a hermetic seal between said housing member and said peripheral edge of each of said dielectric members (36).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE
LARGE AREA PLASMA SOURCE

5 BACKGROUND OF THE INVENTION

The present invention relates to plasma sources for use in the performance of plasma-assisted processes, including deposition and etching processes performed on substrates in processing chambers. The invention particularly
10 relates to plasma sources which allow processing of large area substrates.

There is a demand for plasma sources that will enable processes of the above-mentioned type to be performed on large size wafers and even more so for flat panel display processing. There are indications in the industry that efforts will be made to manufacture flat panel displays measuring 1 meter on a side and plasma-assisted processing of such substrates will require higher plasma ion density levels than are produced in existing systems. Plasma-assisted processing of such large area substrates requires both high plasma density and high pumping speed to achieve high processing rates.

In plasma sources of the type described above, the plasma deposition or etching rate will depend on the ion flux, or ion density, as long as the process gas throughput, or pumping speed, satisfies the processing chamber requirements. Therefore, the achievement of satisfactory processing rates for large area substrates requires both the gas throughput and the ion flux be sufficiently high

In addition, a plasma source having the requisite large dimensions must withstand a considerable force from atmospheric pressure and must be capable of providing an optimum geometry for creation of an electric field that will provide a uniform plasma inside the processing chamber of the source.

BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide a large area plasma source which has the above-mentioned capabilities.

5

Another object of the invention is to provide a large area plasma source housing capable of supporting atmospheric pressure forces while providing a requisite electrostatic shield for the plasma confined within the housing and permitting transmission of RF electromagnetic field energy to the plasma.

10

The invention achieves these and other objects by providing a plasma source housing having side walls made of: metal electrostatic shield members that provide support against atmospheric pressure; or a ridged dielectric wall that is capable of supporting atmospheric pressure and is combined with electrically
15 conductive elements that provide the electrostatic shield function; or a combination of the two. These walls can be shaped according to any vertical geometry including, but not limited to, straight, tapering in or out, curved in or out, etc. Therefore, a plasma source housing can be constructed to have virtually any dimensions and shape needed, while allowing RF energy to be
20 supplied to the plasma through the housing wall. In addition, this housing will readily accommodate a system for cooling the processing chamber walls.

A further object of the invention is to achieve a high degree of plasma uniformity within the processing chamber. Because the RF electric field
25 which creates and maintains the plasma originates in the region which surrounds the processing chamber, plasma uniformity is attained by diffusion, with gas species, or processing gas, flow and plasma gradient combining to provide process uniformity. Therefore, at any pressure and RF power level, plasma uniformity is a function of the aspect ratio of the processing chamber,
30 *i.e.*, the ratio of the square root of the cross sectional area to the height of the processing chamber. The cross-sectional area is the area of a horizontal plane

at a location where the chamber has an average cross-sectional area.

It presently appears that by applying the principles to be disclosed herein together with standard testing procedures, a high degree of plasma uniformity
5 can be achieved.

The above and other objects are achieved, according to the present invention, by a chamber housing enclosing a plasma region in a large area plasma source used for performing plasma assisted processes on large area substrates, the
10 chamber housing comprising:

a housing member constituting a substantially vertically extending wall surrounding a space corresponding to the plasma region, the housing member having a plurality of openings, and electrically conductive elements forming an electrostatic shield around the space;

15 a plurality of dielectric members each having a peripheral edge and each disposed to close a respective opening; and

sealing means forming a hermetic seal between the housing member and the peripheral edge of each of the dielectric members.

20 BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 is a perspective view of a first embodiment of a large area plasma source according the present invention.

25 FIG. 2 is a view similar to that of FIG. 1 showing a second embodiment of the plasma source according to the invention.

FIG. 3 is a perspective, detailed view of a portion of one component of the embodiment shown in FIG. 1, with several elements shown in exploded form.

30

FIG. 4 is a cross-sectional, elevational view taken along line 4-4 of FIG. 1.

FIG. 5 is a view similar to that of FIG. 3, showing a second embodiment of the component of the source shown in FIG. 1.

- 5 FIG. 6A is a view similar to that of FIG. 3, showing a third embodiment of the component of the source shown in FIG. 1.

FIG. 6B is a view similar to that of FIG. 6A showing a modified form of the embodiment of FIG. 6A.

10

FIG. 6C is a cross-sectional detail view of a portion of the structure shown in Fig. 6B.

- FIG. 7 is a cross-sectional plan view of an embodiment of the source
15 illustrated in FIG. 1, looking upwardly from within the chamber housing.

FIGS. 8A and 8B are, respectively, an elevational, cross-sectional detailed view and a bottom plan detailed view of components of the embodiments shown in FIG. 1.

20

FIG. 9 is an elevational, pictorial view illustrating the principle of operation of a component illustrated in FIG. 7.

- FIGS. 10A and 10B are velocity distribution diagrams illustrating different
25 modes of operation of the components shown in FIG. 9.

DETAILED DESCRIPTION OF THE INVENTION

- 30 FIG. 1 illustrates a first embodiment of a processing apparatus according to the invention. This apparatus is composed essentially of a chamber housing 2 and

an enclosure 4 which surrounds housing 2. Housing 2 and enclosure 4 cooperate to delimit an annular space 6 which, in this embodiment, has a rectangular cross-section in a horizontal plane. This is an appropriate shape for processing substrates constituting flat panel displays. However, other cross sections can be provided and, for some applications, e.g., semiconductor wafer processing, a circular cross section will not only correspond to the substrate shape but also provides better structural integrity than a rectangular shape.

Space 6 is filled with a liquid coolant and contains an RF coil 8 that is supplied with an RF current which generates an electric field in the region enclosed by housing 2 in order to ignite and sustain a plasma in processing region 10 enclosed by housing 2 and by upper and lower walls of enclosure 4. Upper wall 12 of enclosure 4 carries coolant supply and return lines 16, vacuum pump assemblies 18 for pumping gas molecules and ions out of processing region 10 and maintaining a desired vacuum pressure therein, and passages (not shown) for couplings used to introduce fresh processing gas into region 10.

Wall 12 additionally carries a fast match assembly, or match network, 20, which is a component that is known *per se* and that is typically made up of an L-network of two variable capacitors and an inductor wherein the variable capacitors are mechanically adjusted by an automatic control network. The purpose of network 20 is to equilibrate the source impedance of the RF generator with the load impedance as seen by the generator looking into the match network and plasma source. Typically, the source impedance of the RF generator is $50\ \Omega$ and, hence, the variable match network components are varied such that the output impedance of the match network is the complex conjugate of the input impedance to the plasma source. During matched conditions, the forward power at the match network juncture is maximized and the reflected power is minimized. Match network designs, although different in speed, robustness and controllability, are all based upon the same

fundamental principles and are often found described in the prior art.

As will be described in greater detail below, chamber housing 2 provides the
5 vertical bounding walls for region 10 and is constructed to withstand the
forces acting on walls 12 and 14 due to the difference between the atmospheric
pressure acting on the outer surfaces of the relatively large area walls 12 and
14 of enclosure 4 and the vacuum pressure established in region 10 and acting
10 on the inner surfaces of those walls. Chamber housing 2 is further constructed
to provide an electrostatic shield for region 10 and allow transmission of RF
energy from coil 8 to region 10. The vertical wall of enclosure 4 may, but need
not, be constructed to assist in withstanding the above-mentioned forces
imposed on walls 12 and 14 by the pressure differentials between opposed
surfaces of each wall.

15

Each vacuum pump 18 is part of a vacuum pump assembly that includes a
respective gate valve or throttle, 22 mounted on wall 12 with the aid of a
coupling flange 24. When gate valve 22 is left wide open, maximum pumping
speed can be achieved. However, partial closure can permit a spatial variation
20 of the pumping speed by means of varied flow restriction through the
distributed pumping orifice. Gate valve 24 can be of a known design.

Flange 24 is a cylindrical part which provides a flow path between a respective
through bore 28 in wall 12 and the inlet end of a respective pump 18. Bores
25 28 are pumping ports which will each communicate with the inlet of a
respective vacuum pump 18. By suitable positioning, and selection of the
number, of bores 28, along with suitable selection and control of the operation
of pumps 18, the exhaust gas flow can be tuned for uniform gas exit from the
region 10. Selection and control of pumps and the arrangement of bores 28
30 can be effected on the basis of principles and practices already well known in
the art.

Attainment of the desired process uniformity also requires appropriate control of gas injection. This aspect of the invention will be described, *infra*.

In addition, the bottom of the source will be provided with a suitable substrate support and means for applying a bias voltage, for example, an RF bias to the support. Here again, such a substrate support can be constructed and installed in the source in accordance with principles and practices already well known in the art.

FIG. 2 is a view similar to that of FIG. 1 showing a second embodiment of a source according to the invention which differs from the source in FIG. 1 essentially with respect to geometric configuration. Whereas chamber 10 of the embodiment shown in FIG. 1 has the form of a parallelepiped, chamber 10' of FIG. 2 has the form of a pyramidal frustum. Thus, the side walls of housing 2' are inclined with respect to a vertical axis of the source as are the side walls of enclosure 4'.

FIG. 3 is a perspective, detail view showing a portion of housing 2, which is made of a conductive material, such as aluminum, and is given a wall thickness sufficient to provide the requisite compressive and tensile strengths. When the interior of enclosure 4 is under a vacuum, integrated pressure forces directed toward the interior thereof will generate a bending moment within the material, hence creating separate regions of enclosure 4 that are under tension or compression.

25

Being made of a conductive material, housing 2 constitutes an electrostatic shield. Housing 2 is provided with a series of vertically elongated recesses 32 that are spaced at uniform intervals about the housing periphery. At the center of each recess 32, there is a narrow, elongated slot 34 which extends through the remaining thickness of housing 2 to communicate with region 10. Each recess 32 is provided with an insert 36 made of a dielectric material, such as

alumina, with a projecting portion that extends into slot 34 of its respective recess 32. Each insert 36 is provided with four elastomeric vacuum seals 40 and 40' at the inwardly facing surface of insert 36 and 42 and 42' at the outside of insert 36. Each insert 36 is covered by a respective frame 46 which
5 holds its associated insert 36 and seals 40, 42 in place in recess 32, with the aid of a plurality of screws (not shown) that extend through screw holes 48. Between the two seals 40 and 40' there is provided at least one passage to atmosphere, shown at 52 in FIG. 4. This passage is fabricated to extend to a location outside of enclosure 4 for access when the system is totally
10 assembled. Passage 52 allows for leak checking both seals 40 and 40'. Thus, both sealing with respect to the coolant fluid 54 between chamber 2 and wall 4 and sealing with respect to the vacuum in region 10 can be checked with one port.

15 RF energy can flow from coil 8 into region 10 through inserts 36 and slots 34.

FIG. 5 shows another form of construction of the embodiment of FIG.1. In the form of construction shown in FIG. 5, housing 2 is provided with vertically elongated slots 60 that extend through the entire wall thickness of housing 2.
20 In the illustrated embodiment, each slot 60 has an outwardly diverging, or flaring, portion adjacent the exterior surface of housing 2, and a portion 64 having a surface that is perpendicular to the vertical walls of housing 2. A dielectric window 66 is installed in portion 64 of each slot 60 and is secured to portion 64 by a metal band 68 which is brazed to both portion 64 and the
25 peripheral edge of dielectric window 66. Band 68 serves to compensate for thermal expansion differences between dielectric window 66 and housing 2.

FIG. 5 shows a broken-away portion of the outer vertical surface of housing 2. The reason for this portion is to better illustrate the cross-sectional form of the regions between adjacent slots 60.

Band 68 may be made of Kovar™, which is a trade-name for a metal alloy containing 54% iron, 29% nickel and 17% cobalt. The coefficient of thermal expansion for Kovar is between that of the metal housing and dielectric window. The use of such a material is common to the industry.

5

In the embodiment of FIG. 5, each slot 60 can be given a larger area than each slot 34 of the embodiment shown in FIGs. 3 and 4, so that the FIG. 5 embodiment is capable of providing a larger total effective dielectric window area for passage of RF energy into region 10. In addition, the structure, or
10 structural area, necessary to fasten the dielectric window to the housing walls of the plasma source is minimized in this embodiment.

FIG.6A illustrates a further embodiment of a chamber housing 72 according to the invention. Housing 72 has the same general form as housing 2 of FIG. 1,
15 but is provided on each side with a large area opening 74 surrounded by a recessed portion 76 that frames opening 74. Each opening 74 is completely covered by a rigid dielectric panel 78 made, for example, of alumina. Each panel 78 is a one-piece dielectric body composed of a flat base portion 80 and a plurality of vertically extending ribs 82 that project at right angles from base
20 portion 80. Panel 78 is dimensioned to extend entirely across opening 74 and recessed portion 76.

Housing 72 is further provided with a plurality of elongated load supporting members 86 made of electrically conducting material, such as aluminum. Each
25 member 86 has a T-shaped cross section, is seated between two adjacent ribs 82 and is securely connected at its upper and lower ends to top and bottom edges of housing 72. Members 86 function as the conductive members of the electrostatic shield and it is important these members have good RF electrical contact to housing 72 both at the top and bottom. Satisfactory contact, and a
30 sound mechanical connection, can be provided by using machine screws (not shown) to secure the upper and lower ends of each member 86 to the top and bottom edges of housing 72. Because members 86 are made of metal and are

therefore relatively inelastic, a layer of an elastic material is preferably disposed between each member 86 and its associated part of base portion 80. One such member 88 is shown in broken lines in FIG. 6A.

- 5 As an alternative to the embodiment illustrated in FIG. 6A, the electrostatic shielding may be provided in the form of a metal coating on the external surface of each panel 78, as shown in FIG. 6B. This coating will be in the form of individual strips each located between two adjacent ribs 82. In this embodiment, ribs 82 are shortened so that their ends are spaced from the upper and lower edges of each panel 78. Upper and lower window braces 89 (only upper brace 89 is shown in FIG. 6B) extend along the upper and lower edges of each panel 78, are provided with notches that receive the ends of ribs 82 and with tabs which interlock with the ribs 82. These tabs are in direct contact with the applied metal coating. Window braces 89 secure the entire perimeter of each dielectric panel 78 to the associated opening in housing 72. Braces 89 are bolted to housing 72 as shown in FIG. 6B.

- Each brace 89 has certain built in features that are shown in FIG. 6C. In particular, FIG. 6C shows O-ring seals 40 and 40' and leak testing port 52'. In both embodiments presented in FIGs. 6A and 6B, each dielectric panel 78 must be capable of withstanding the bending moments imposed due to inwardly directed pressure forces present when a chamber vacuum exists. This the primary purpose of ribs 82.

- 25 In the case of the embodiment shown in FIG. 6A and the alternative thereto described above, each dielectric panel 78 is hermetically sealed to its associated recessed portion 76 by at least two O-rings held in grooves 41. Preferably, sealing is achieved by the provision of dual elastomeric seals, like rings 40 and 40', separated by a space which is coupled by a series of passages, like passage 52, internal to the housing to the outside to allow technicians to sense liquid leaks or vacuum leaks.

FIG. 7 is a cross-sectional plan view showing the wall of chamber 2 and the bottom surface of wall 12 when one looks upwardly from within chamber region 10. Wall 12 carries an array of processing gas introduction tubes 90 having vertically extending inlet portions 92 that extend through, and are supported by, dielectric inserts 96 that are secured in openings 98 in wall 12. Inserts 96 and other dielectric parts of this assembly may be made of, for example, PTFE. Each tube 90 has a horizontally extending outlet portion 94 that extends between its associated inlet portions 92. Outlet portion 94 of each tube 90 is provided with a row of outlet holes, or injection nozzles, 94' (FIGs. 8A and 8B) extending along the length thereof.

Outlet portions 94 of tubes 90 can be placed at a height above the substrate to be treated that allows the optimum gas species to arrive at the substrate. As the distance between outlet portions 94 and the substrate is increased, the spacing between tubes 90 can be increased while the density of ionized gas reaching the substrate remains approximately uniform. Of course, an increase in the spacing between tubes 90 results in a reduction in the number of tubes. For certain processes, however, it may be desirable to bring the outlet portions of tubes 90 closer to the substrate. This may be done, for example, if it is desired to reduce the time between gas ionization and contact of the resulting ions with the substrate.

Each gas injection tube input portion is connected to a flow regulating valve or an individual mass flow controller to control the injection of gas from an inlet manifold (not shown). By controlling the flow of gas into each end of each tube 90, a variety of gas injection profiles are made possible, as will be described below.

At the center of wall 12 there is provided a viewport 99 in the form of a funnel-shaped passage. This funnel-shaped passage is angled such that it

provides a field of view encompassing the entire substrate being processed. Viewport 99 may be used simply for visual inspection of the chamber and its process, or it may accommodate a diagnostic system requiring optical access to the inner chamber

5

The exterior surfaces of gas introduction tubes 90 will become coated with residue of the processing gasses over the course of time. According to a further feature of the invention, these coatings can be removed from tubes 90 by applying RF bias to tubes 90 during cleaning of the interior of housing 2.

10

Such cleaning is conventionally performed periodically in present day etch or deposition chambers by a separate cleaning process wherein the chamber is cleaned with a substrate installed in region 10. Region 10 is filled with a gas which, when ionized in a plasma, is capable of removing residue coating from surfaces within housing 2 and a plasma generating RF field is created in region 10. In wafer processing, this cleaning process is often conducted at very much higher pressure than the normal process pressure to improve the chemical process rate by increasing the number of atoms, or ions, in the plasma. Applying RF bias to parts of housing 2 can also increase the residue removal rate.

20

It is also known to install a metal electrode outside the housing and behind the dielectric wall of the housing and to apply a voltage to the electrode in order to provide bias to the wall and increase the cleaning rate. An arrangement of this type is disclosed, for example, in pending provisional application 60/065,794, by Wayne Johnson, entitled ALL RF BIASABLE AND/OR SURFACE TEMPERATURE CONTROLLED ESRF.

25

Application of RF bias to tubes 90 can increase the energy of ion bombardment within tubes 90 and thus increase the rate and effectiveness with which residues are etched away from their interior walls. Ion bombardment

30

can be thought of as increasing the surface temperature of surfaces being bombarded and hence can increase the chemical reaction rates.

Preferably, injection tubes 90 are made of anodized aluminum or are
5 composed of a metal tube component sheathed in dielectric tubing made of quartz or alumina.

To allow for application of a cleaning RF bias voltage to tubes 90, it is necessary to isolate tubes 90 electrically from the walls of enclosure 4. Such
10 isolation is needed so that plasma is not created inside the tubes that deliver gas. This bias will not be applied during normal operation, but only during periodic cleaning cycles. The RF bias to the gas injection tubes is applied periodically to clean the exterior surface (or process side). During etch process, contaminants may build up on the tube surface. To minimize long-
15 term particulate contamination, the exterior surface of the injection tubes (in addition to all surfaces within the chamber) must be cleaned during a cleaning cycle. The RF bias will generate a DC self-bias (and resultant average voltage difference across the sheath) which in-turn affects the average ion energy delivered to the injection tube surface.

20

If the tubes are made of conductive material, then a capacitor is needed to allow them to charge by self-bias.

In order to prevent the generation of a plasma within the interior volume of the
25 injection tubes during RF bias application, it is possible to use strictures inside the tube that minimize breakdown by use of dielectric surface area. One example is a bundle of capillary tubes of dielectric material (quartz) in the gas flow path as has been used in the semiconductor industry to deliver process gas to an upper electrode-inject plate.

30

FIGs. 8A and 8B show details of an arrangement for supplying RF voltage to

an injection tube 90. FIG. 8A is a cross-sectional view and FIG. 8B is a bottom plan view of the entrance region of one injection tube 90 via which process gas is supplied and RF bias is applied. This assembly resides within upper wall 12. Process gas is fed from a standard gas line and fitted to the gas injection system using a standard fitting 102, as shown. Dielectric inserts 96 isolate fitting 102 from a conductive base ring 104 which surrounds inlet portion 92. A RF voltage is applied to ring 104 through a standard connection flange made at the output of the respective match network, an RF connection interface 108 and a RF inner conductor 110 which forms a unit with base ring 104. The RF feed input to the gas injection RF bias assembly is a standard feed consisting of inner conductor 110, an outer conductor 114 and a dielectric 116 sandwiched between the conductors. Inner conductor 110 attaches to base ring 104 that is in immediate contact with gas injection tube 90. Outer conductor 114 is integral with a support plate 120. Dielectric inserts 96 and 116 isolate outer conductor 114 and its support plate 120 from inner conductor 110 and ring 104.

According to the invention, the distribution of processing gas within region 10, using the injection tube arrangement shown in FIG. 7, can be controlled by suitable selection of one or more of gas inlet pressure, gas flow rate and the total area of the injection nozzles (94') in each tube 90. The relationships involved in effecting this control will be described with reference to FIGs. 7, 9, 10A and 10B.

As shown in FIG. 7, processing gas enters region 10 via the array of injection tubes 90 whose outlet portions 94 lie in a common horizontal plane located at a selected vertical distance below enclosure wall 12, which wall constitutes a pump manifold plate. However, it is not necessary that all injection tubes 90 lie in a common horizontal plane. In fact, it may be beneficial to vary their vertical spacing relative to the wafer plane.

Injection tubes 90 are equally spaced (with spacing d) in one horizontal direction. As illustrated in FIG. 9, outlet portion 94 of each tube 90 has a length $2L$ in a horizontal direction across region 10. As noted earlier herein, the number of tubes 90, and their spacing, d , can be varied to achieve a selected processing result. Equally, length $2L$ is selected on the basis of the desired processing result. Each injection tube 90 has a cross-sectional area A_1 along its entire length, *i.e.*, along its inlet and outlet portions, and outlet portion 94 of each tube 90 is provided with N injection nozzles (94' in FIGs. 8A and 8B) each having a cross-sectional area A_2 . Thus, the injection nozzles in one tube 90 have a total outlet area $A_{2T} = NA_2$. The injection nozzles are uniformly spaced apart with a spacing Δl between the center lines of adjacent injection nozzles. Gas is fed to both ends of a tube 90 with an inlet pressure P_i and a volume flow rate Q at each end, *i.e.*, at each inlet portion. This is also elaborated in the discussion of FIG. 9. The cross-sectional area of each tube 90 need not be constant nor do the injection nozzles need to be equally spaced. Clustering of the injection nozzles may be beneficial for additional gas injection control.

The injection system is designed to introduce the processing gas to a large volume chamber region 10 in which a vacuum pressure P_c is maintained. The gas is introduced at subsonic speeds, *i.e.*, $M = v/a < 0.3-0.5$ where M is the Mach number, v is the gas velocity at each exit orifice and a is the local speed of sound.

According to the invention, the distribution, or gradient, of gas exit velocities across the length of output portion 94 of a tube 90 can be controlled by proper selection of the flow rate Q and the inlet total pressure P_i at both ends of that tube 90. The particular gradient established will influence the uniformity of the plasma-assisted treatment across the substrate surface.

When the flow rate Q into an injection tube 90 is high, an exit velocity

distribution can be obtained such that the velocity is greatest at the mid-point of the length of the outlet portion of the tube and decreases progressively toward the ends thereof. Alternatively, when the flow rate Q is low, the velocity distribution is such that the greatest velocities are achieved at the ends of tube outlet portion 94. Hence, it is possible to control the velocity distribution along the length of the outlet portion of a tube 90, or the span-wise velocity distribution, by adjusting the inlet volume flow rate Q .

For the sake of clarity, the terms "high flow rate" and "low flow rate" will be defined. A "high flow rate" is one in which the gas momentum is large relative to the difference in pressure between the gas in the injection tube and the chamber pressure. Similarly, a "low flow rate" is one in which the relative gas momentum is small. In the case of a high flow rate, the lateral pressure gradient is unable to sufficiently bend the "high" momentum fluid and accelerate it through the adjacent injection nozzle; therefore, the predominant mechanism is deceleration of the gas to a stagnation pressure at the midpoint of the length of the outlet portion 94 of the tube 90 where momentum is cancelled and a sufficient pressure difference can be achieved. The stagnation flow at the outlet portion midpoint is simply a consequence of introducing process gas at both ends of the injection tube. In the case of a low flow rate, the gas momentum is such that gas will tend to exit via openings at the ends of the outlet portion of the injection tube under the effect of the differential between the inlet pressure and the pressure in chamber region 10; as gas exits through successive injection nozzles 94', the pressure within outlet portion 94 of a tube 90 decreases.

Taking a more rigorous approach, the above explanation can be substantiated in a clearer manner. Consider the transverse equation of momentum for the coordinate system indicated in FIG. 9. Assuming the flow to be steady and two-dimensional and neglecting the viscous terms, the transverse equation of momentum becomes:

$$\frac{-1}{\rho} \frac{\partial P}{\partial r} = v_z \frac{\partial v_r}{\partial z} + v_r \frac{\partial v_r}{\partial r} \quad (1)$$

The radial pressure gradient is balanced by two terms; the first of which represents the transfer of stream-wise momentum (in the direction z) into radial momentum (in the direction r), and the second of which represents the radial acceleration of the radial flow. The injection tube design depends on an independent set of parameters including ρ_0 , Q , P_t , P_c , A_1 , A_{2t} , Δl and L ; refer to FIG. 9. Note that this parameter list excludes the number N of injection nozzles 94' and their respective cross-sectional areas A_2 since $N=2L/\Delta l$ and $A_2=A_{2T}/N$. Neglecting compressibility effects (a good assumption for $M<0.3$), the radial equation of momentum is non-dimensionalized using the following relationships

$$z^* = \frac{z}{\Delta l} \quad (2a) \quad r^* = \frac{A_{2T} r}{2A_1 \Delta l} \quad (2b) \quad v_z^* = \frac{A_1 v_z}{Q} \quad (2c)$$

$$v_r^* = \frac{A_{2T} v_r}{2Q} \quad (2d) \quad P^* = \frac{P}{\Delta P} \quad (2e) \quad \rho^* = \frac{\rho}{\rho_0} \quad (2f)$$

where $\Delta P = P_t - P_c$; ρ represents local density, and ρ_0 represents density at stagnation conditions. The radial length and velocity scales are obtained by virtue of continuity. Hence, the non dimensional radial equation of momentum is obtained,

$$\frac{\partial P^*}{\rho^* \partial r^*} = B^* \left(v_z^* \frac{\partial v_r^*}{\partial z^*} + v_r^* \frac{\partial v_r^*}{\partial r^*} \right) \quad (3)$$

which identifies the non-dimensional parameter

$$B^* = \frac{4\rho_0 Q^2}{A_{2T}^2 \Delta P} \quad (4)$$

When $B^* \gg 1$, this corresponds to high flow rates at which the pressure gradient is inadequate to substantially turn the stream-wise momentum and, hence, larger velocities exit at the midpoint, or center, of the outlet portion of the injection tube. Conversely, $B^* \ll 1$ corresponds to low flow rates at which the opposite is true. The resulting velocity distributions are depicted in FIGs 10A and 10B.

Thus, if $B^* = 1$, the gas exit velocity will be constant along the length of outlet portion 94 of tube 90. For many processes, this will be the preferred exit velocity distribution. However, there may be situations in which it is preferable that $B^* \neq 1$. For example, the RF field generated in region 10 may vary in intensity in radial directions perpendicular to the vertical center axis of region 10. In such a case, a gas flow rate variation having a form shown in one of FIGs. 10A and 10B may be used to compensate for the RF field variation in order to produce a processing result which is uniform across the surface of the substrate.

Close inspection of the definition of B^* provides insight into the design of injection tubes 90. For example, the condition $B^* \gg 1$ can be achieved by performing any one of the following actions while holding all other parameters constant: increase Q (increase the gas momentum $\rho_0 V$); decrease ΔP (reduce the turning force); and decrease A_{2T} (provide greater flow resistance).

Typically, a fixed relation will exist between a given value for P_c , inlet pressure and flow rate. However, it might be possible to independently control the inlet total pressure and the mass flow rate. This would require adjusting the total pressure losses in the system using throttle valves. For example, the throttle valve upstream of the turbo-molecular pump can adjust the chamber pressure and pressure regulators upstream of the injection tubes can regulate the total pressure.

Considering the list of independent dimensional parameters listed previously, it is sufficient to define a parameter for uniformity $u = P(z=0) - P(z=L)$ such that the non-dimensional uniformity $u^* = u/\Delta P$ takes the form

$$u^* = u^* \left(B^*, \frac{\Delta \ell}{L}, \frac{\Delta P}{P_c}, \frac{A_2}{A_1}, \frac{A_1}{L^2} \right) \quad (5)$$

- 5 We consider the asymptotic limit where the four latter parameters go to zero, *i.e.*, the number of injection nozzles is large ($\Delta \ell/L \rightarrow 0$), the pressure difference is small relative to the absolute value ($\Delta P/P_c \rightarrow 0$), each injection nozzle area A_2 is small relative to the injection tube cross-sectional area ($A_2/A_1 \rightarrow 0$), and the injection tube is long relative to its diameter ($A_1/L^2 \rightarrow 0$). Nominal
- 10 conditions for $B^* \sim 1$ are: $\Delta \ell = 1.0$ cm, $L = 50$ cm, $N = 100$, $A_1 = 1.77$ cm², $A_2 = 0.0079$ cm², $P_c = 500$ mTorr, $P_i = 600$ mTorr and $Q = 160$ sccm (or $Q_{tot} = 320$ sccm).

- According to various alternatives made possible by the invention, it may be
- 15 desirable to allow the gas flow to choke at the gas injection nozzles 94'. When the pressure ratio across an injection nozzles 94' (*i.e.*, the ratio of the total pressure inside the injection tube to the ambient chamber pressure beyond the exit of the injection nozzle) is sufficiently large, the injection nozzle reaches a "choked" condition wherein the volume flow rate is invariant with either
- 20 further reduction of the back pressure (or chamber pressure) or increase of the inlet total pressure. In fact, the mass flow can only be increased further by increasing the total inlet pressure (hence affecting the gas density). Since the volume flow rate at an injection nozzle exit is invariant and the injection nozzle exit area is constant, this implies that the exit velocity is constant.
- 25 However, one may redistribute the injection nozzles 94' in injection tube 90 in order to affect the mass flow distribution entering the chamber. Hence, the mass flow distribution may be designed to behave in either manner as described in FIGs. 10A and 10B. For example, if injection nozzles 94' are clustered towards the ends of injection tubes 90, then a mass flow distribution

similar to FIG. 10B can be obtained. Conversely, if injection nozzles 94' are clustered towards the center of the injection tubes, then a mass flow distribution similar to FIG. 10A can be obtained. Additionally, far from the injection plane (approximately 10 to 20 injection nozzle diameters) the velocity distribution will behave similar to these distribution forms.

There are several advantages to the use of the gas injection tubes, namely: RF bias of the gas injection tubes allows periodic cleaning of the exterior surface; variable placement of adjacent tubes in separate vertical and/or horizontal planes, allowing each injection tube to be located at a different vertical height above the substrate for improved process control; selectable injection nozzle distribution for modification of inlet mass flow distribution; supersonic or subsonic injection capability; and adjustment of gas momentum in the injection tubes for mass flow redistribution subsonic injection.

15

As mentioned earlier herein with reference to FIGs. 1 and 2, a plasma source according to the invention includes a plurality of pumps 18 that continuously withdraw gas from region 10 during a processing operation. Each pump 18 acts primarily on an associated section of region 10. Processing at high rates requires high gas throughput to get the desired number of surface chemical reactions to occur. Processing needs high gas throughput and high plasma density. The large number of pumps employed in the embodiments disclosed herein provide the high pumping capacity needed to achieve high processing rates for large area substrates. Each pump is fitted with a throttle control valve, as shown at 22 in FIG. 1, that can regulate the pumping speed of that pump. By individually controlling the pumping speed of each pump 18, a wide variety of pumping speed profiles are possible. Each pump 18 may be constituted by any type of pump currently employed in plasma processing apparatus. Solely by way of non-limiting example, each pump 18 may be a turbomolecular pump, or turbo-pump, with or without a backing pump.

30

As indicated in FIGs. 1 and 2, apparatus according to the invention may be equipped with sixteen (4x4) pumps 18. Each pump may be a 1000 liter/sec turbo-pump positioned atop wall 12. Processing gas is directed towards the substrate from injection nozzles 94' in injection tubes 90 by the momentum
5 created by the velocity at which the processing gas exits from the injection nozzles. After interacting with the substrate, unused process gas and volatile reaction products are removed via pumps 18. In order to minimize the interaction of reaction products with incoming process gas, an outward pressure gradient is established to bias the reaction products to flow to the
10 outer walls and then upward to the pumps. This is accomplished by reducing the pumping rate of the pumps 18 that are proximate to the center of plate 12, for example by slightly closing the valves of the those pumps to decrease their pump conductance. In this manner lower chamber pressures can be achieved towards the walls of the chamber housing 2, 2'.

15

While the description above refers to particular embodiments of the present invention, it will be understood that many modifications may be made without departing from the spirit thereof. The accompanying claims are intended to cover such modifications as would fall within the true scope and spirit of the
20 present invention.

A plasma source according to the invention may include a conventional chuck for holding the substrate, or wafer, to be processed. The chuck would be typical of most conventional plasma sources. In addition to holding the
25 substrate, it should be capable of applying a RF bias to and heating the substrate. Therefore, for large area processing, this chuck could consist of multiple segments.

The presently disclosed embodiments are therefore to be considered in all
30 respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims, rather than the foregoing description, and all

changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

WHAT IS CLAIMED IS:

1. A chamber housing enclosing a plasma region in a large area
5 plasma source used for performing plasma assisted processes on large area
substrates, said chamber housing comprising:
a housing member constituting a substantially vertically extending wall
surrounding a space corresponding to the plasma region, said housing member
having a plurality of openings, and electrically conductive elements forming an
10 electrostatic shield around the space;
a plurality of dielectric members each having a peripheral edge and
each disposed to close a respective opening; and
sealing means forming a hermetic seal between said housing member
and said peripheral edge of each of said dielectric members.
15
2. The chamber housing according to claim 1 wherein said
housing member has a plurality of recesses, each of said openings is formed in
a respective recess, and said sealing means are disposed between said
peripheral edge of each of said dielectric members and said recesses.
20
3. The chamber housing according to claim 2 wherein said wall
has a polygonal form with a plurality of flat sides.
4. The chamber housing according to claim 3 wherein each of said
25 sides has a single opening.
5. The chamber housing according to claim 4 wherein said
electrically conductive elements are metal bars extending between, and
secured to, upper and lower edges of said wall, each of said metal bars
30 extending across a respective opening.

6. The chamber housing according to claim 5 further comprising elastic members interposed between said metal bars and said dielectric members.

5 7. The chamber housing according to claim 3 wherein each of said sides has a plurality of openings.

8. The chamber housing according to claim 7 wherein said electrically conductive elements are constituted by portions of said wall that
10 extend between top and bottom edges of said wall and are interposed between said openings.

9. The chamber housing according to claim 8 wherein each of said dielectric members has a projecting portion that extends into said opening.

15


10. The chamber housing according to claim 3 wherein said flat sides extend vertically.

11. The chamber housing according to claim 3 wherein said wall
20 has the form of a pyramidal frustum.

12. The chamber housing according to claim 2 wherein: said sealing means comprise, for each of said dielectric members, two annular seats disposed at an interface between said dielectric member and its associated
25 recess, said seals being spaced apart along the interface; said wall has a passage having a first end in communication with the interface and a second end remote from the interface; and said housing further comprises pressure monitoring means connected to said second end of said passage to monitor leakage of fluid past either one of said seals.

13. A large area plasma source used for performing plasma assisted processes on large area substrates in a plasma region, said source comprising:
- the chamber housing according to claim 1;
 - a coil surrounding said housing and operative for generating an
 - 5 RF field in the plasma region;
 - an enclosure member surrounding said housing and the plasma region;
 - gas injection means extending through said enclosure member for introducing an ionizable processing gas into the plasma region;
 - 10 substrate support means for supporting a substrate to be processed in the plasma region; and
 - a least one pump disposed for pumping gas out of the plasma region to maintain a low pressure in the plasma region.
14. The plasma source according to claim 13 wherein said gas injection means comprise at least one gas injection tube having at least one inlet portion for receiving a supply of the ionizable processing gas and an outlet portion provided with a plurality of injection nozzles via which the ionizable processing gas is conveyed from said inlet portion to the plasma
- 20 region, wherein said outlet portion extends parallel to a substrate supported on said substrate support means.
15. The plasma source according to claim 14 wherein said at least one gas injection tube has two inlet portions and said outlet portion is
- 25 interposed between said two inlet portions.
16. The plasma source according to claim 15 wherein said outlet portion of said at least one gas injection tube extends in a straight line between said two inlet portions.

17. The plasma source according to claim 16 wherein said at least one gas injection tube comprises a plurality of gas injection tubes spaced from one another in a plane parallel to a substrate supported on said substrate support means.

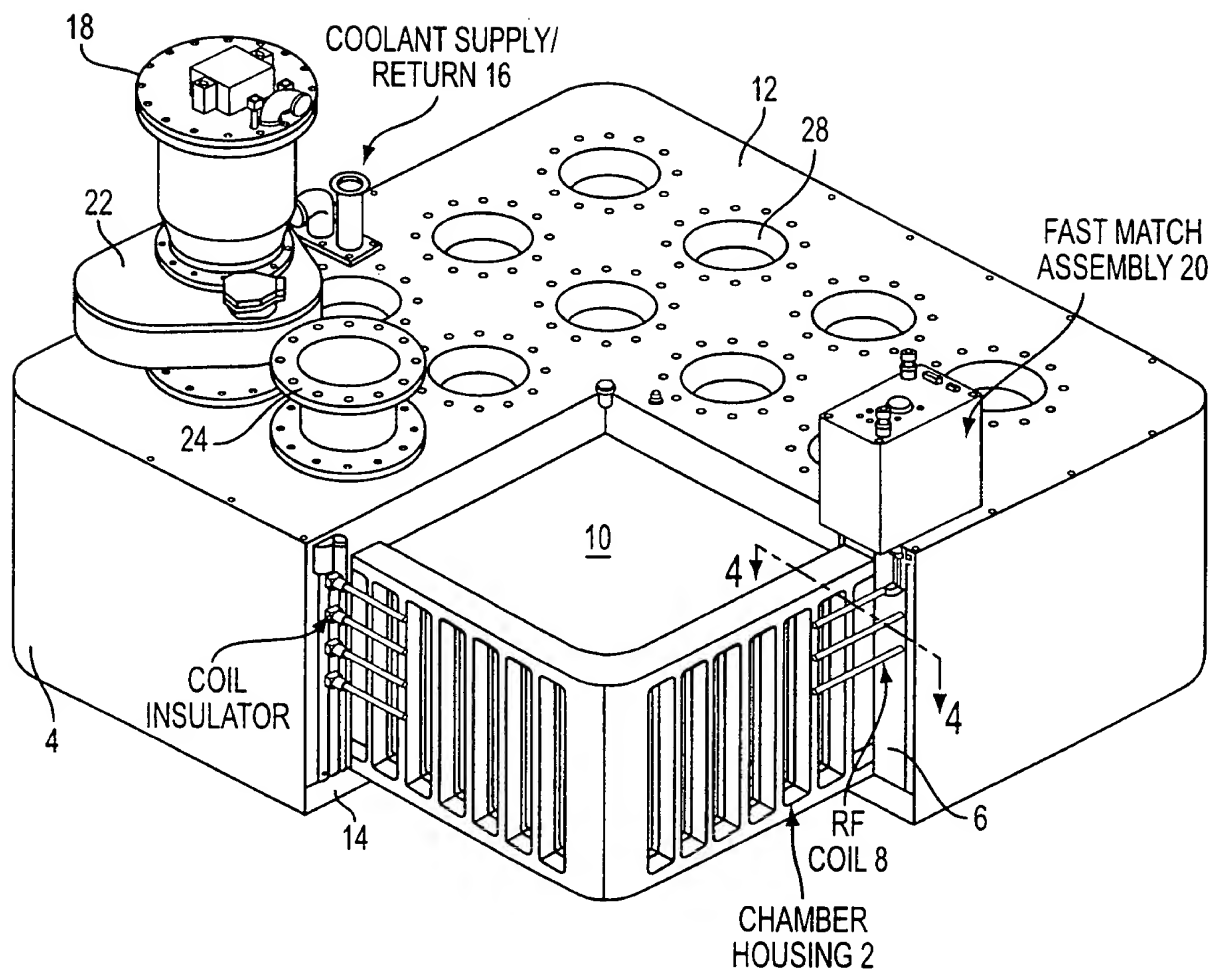

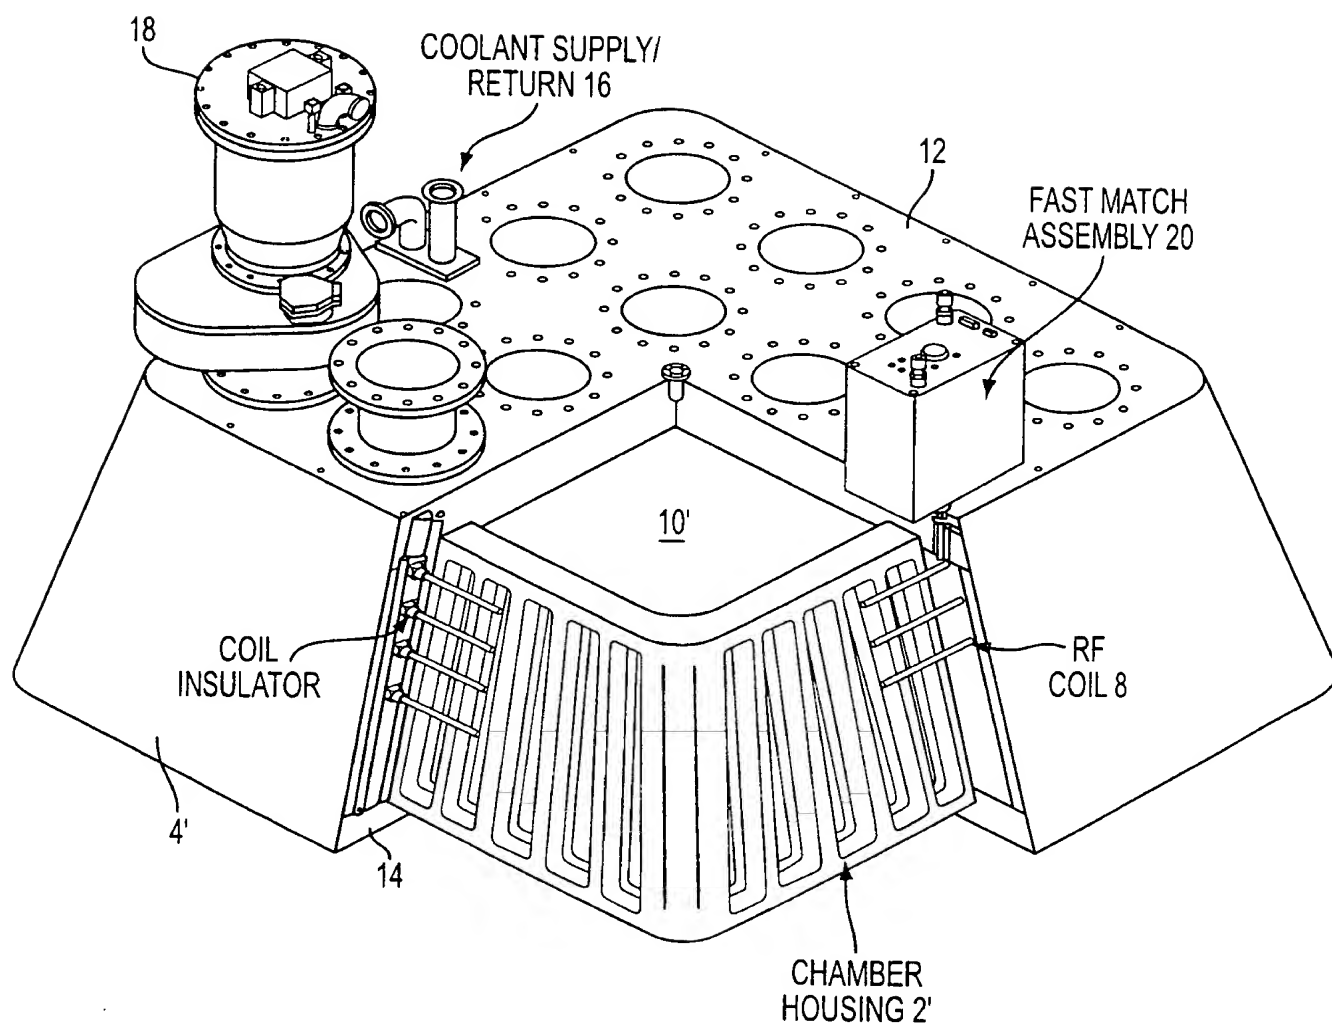


FIG. 2

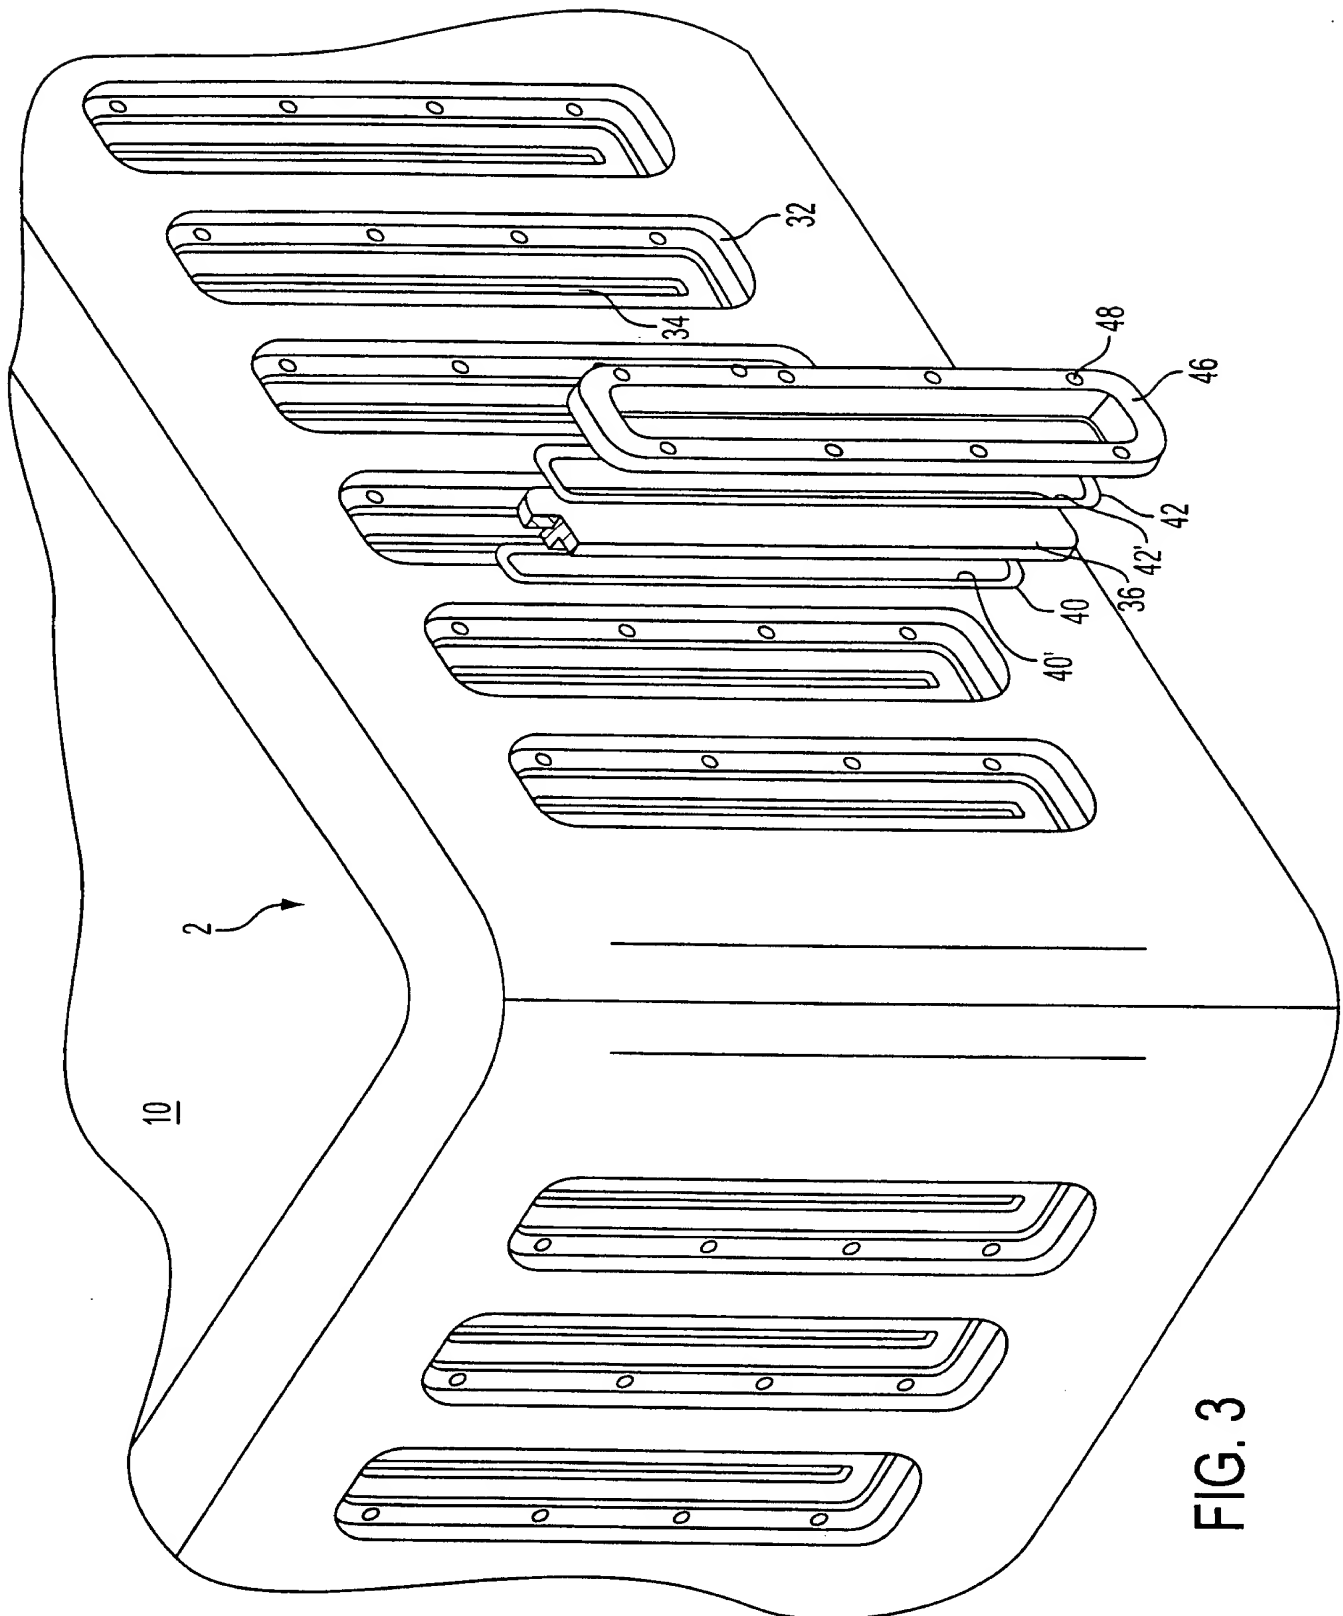


FIG. 3

4/11

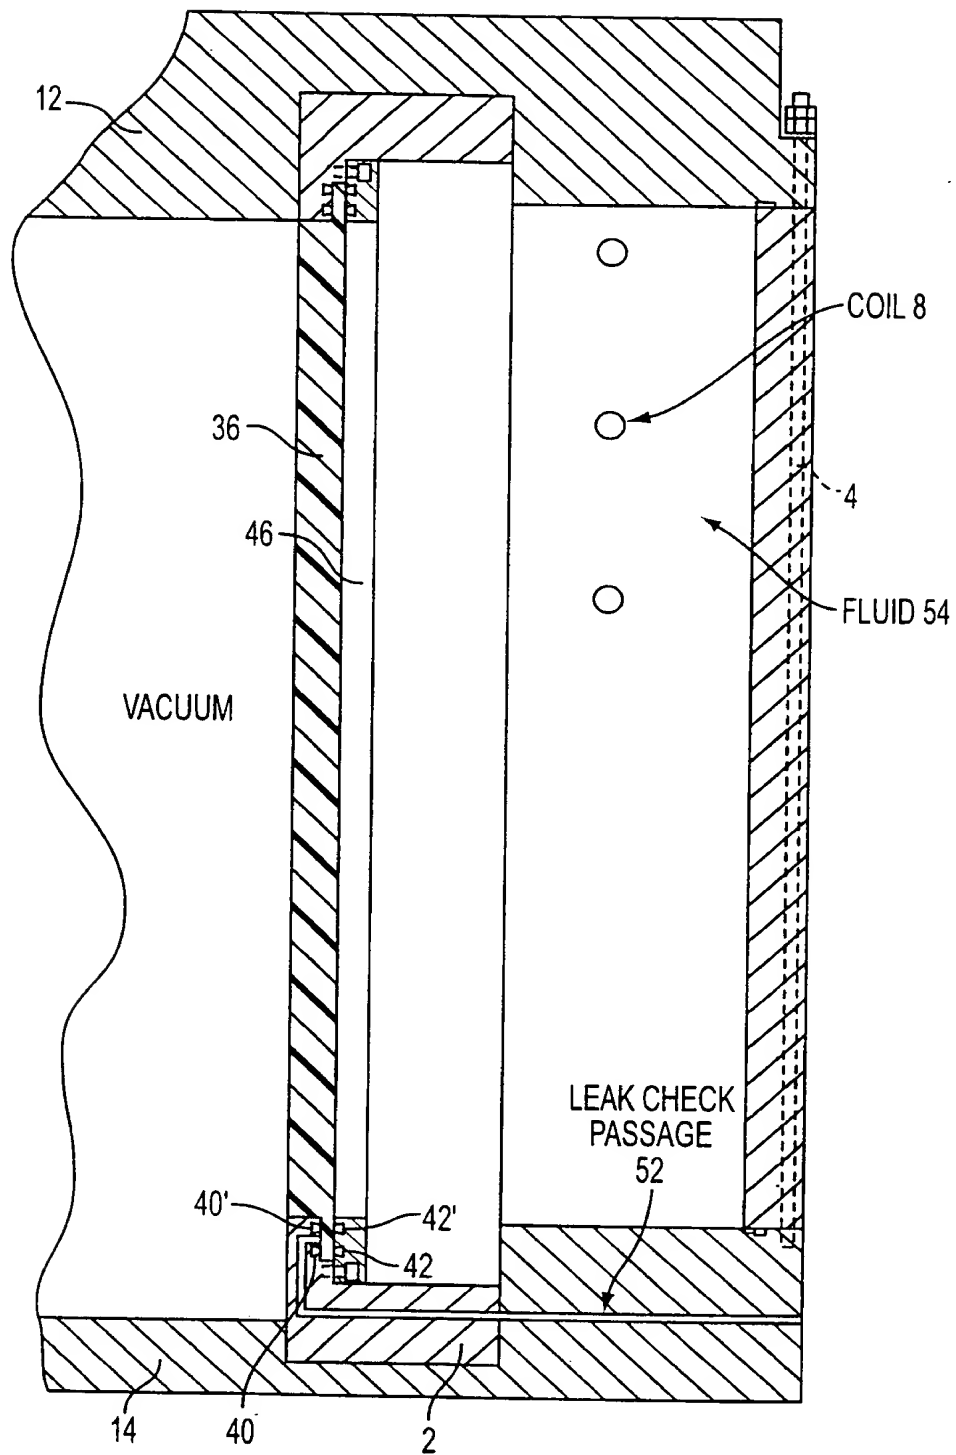


FIG. 4

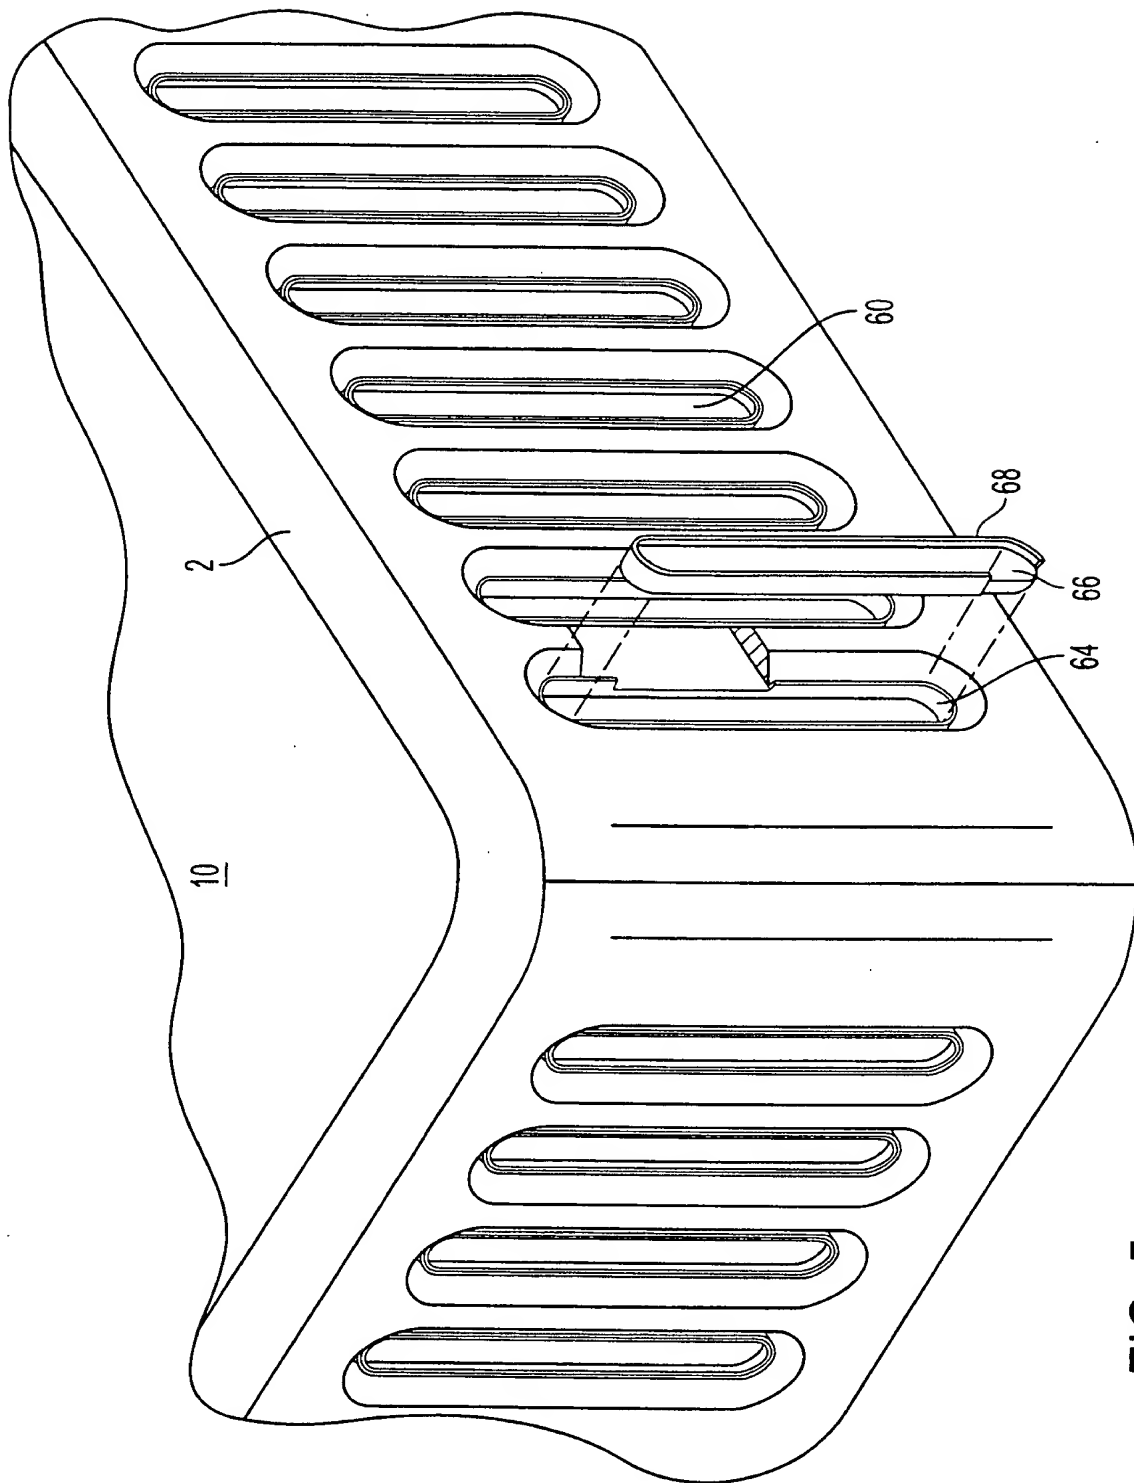


FIG. 5

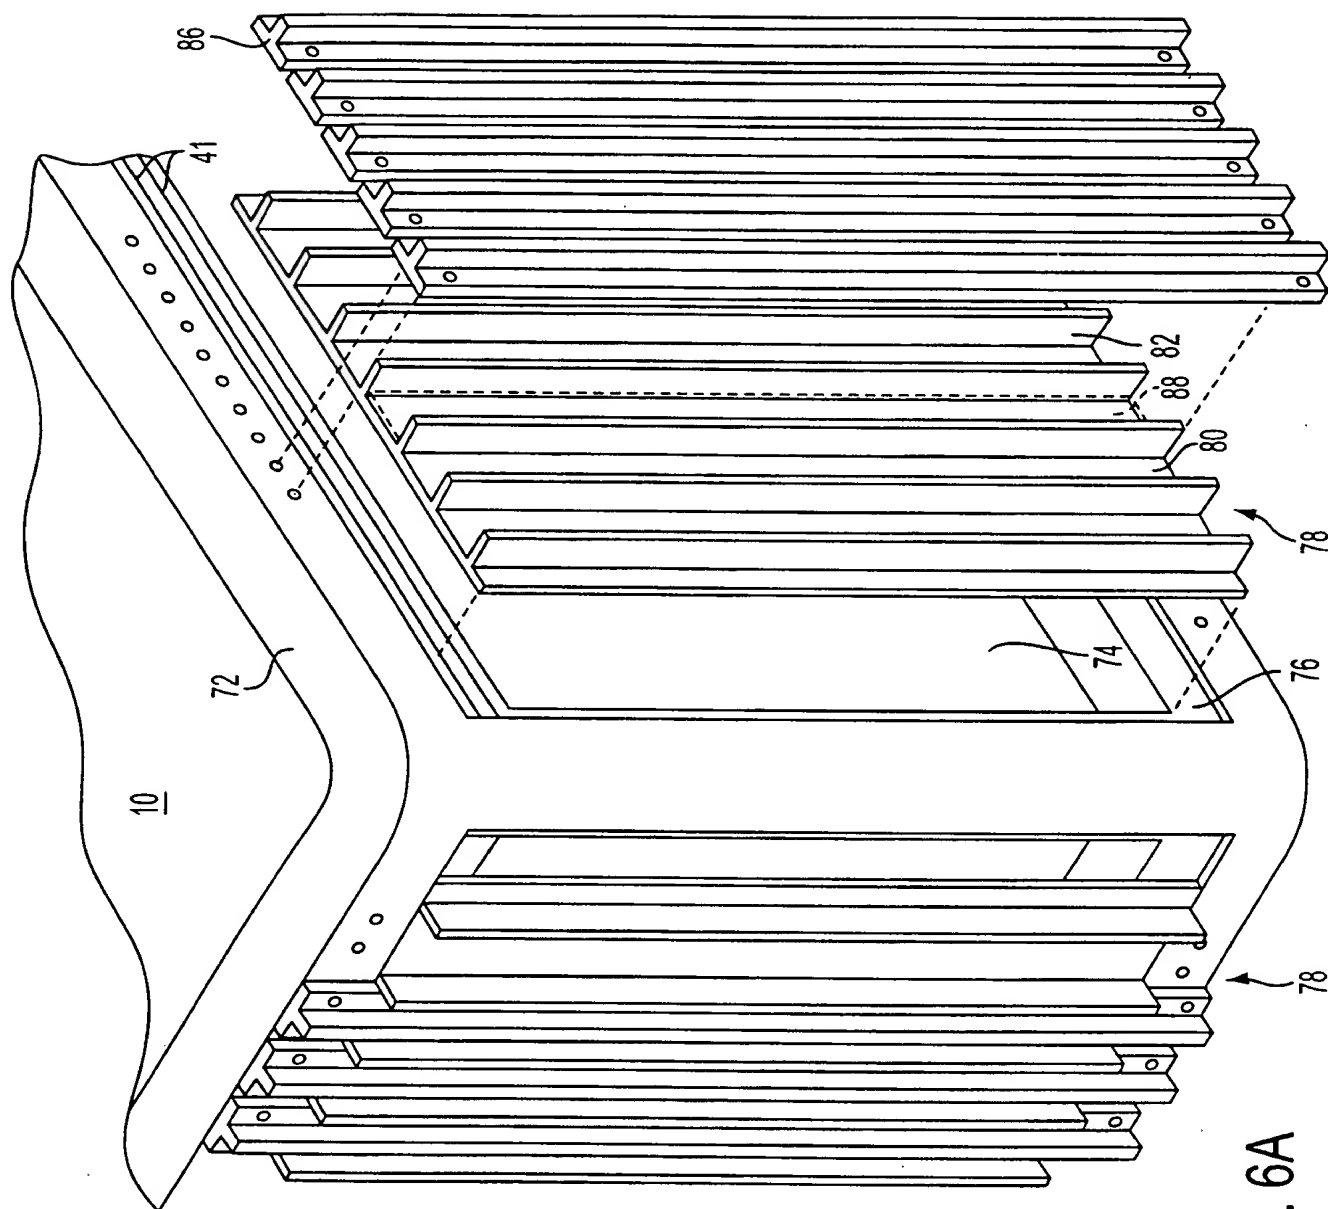


FIG. 6A

7/11

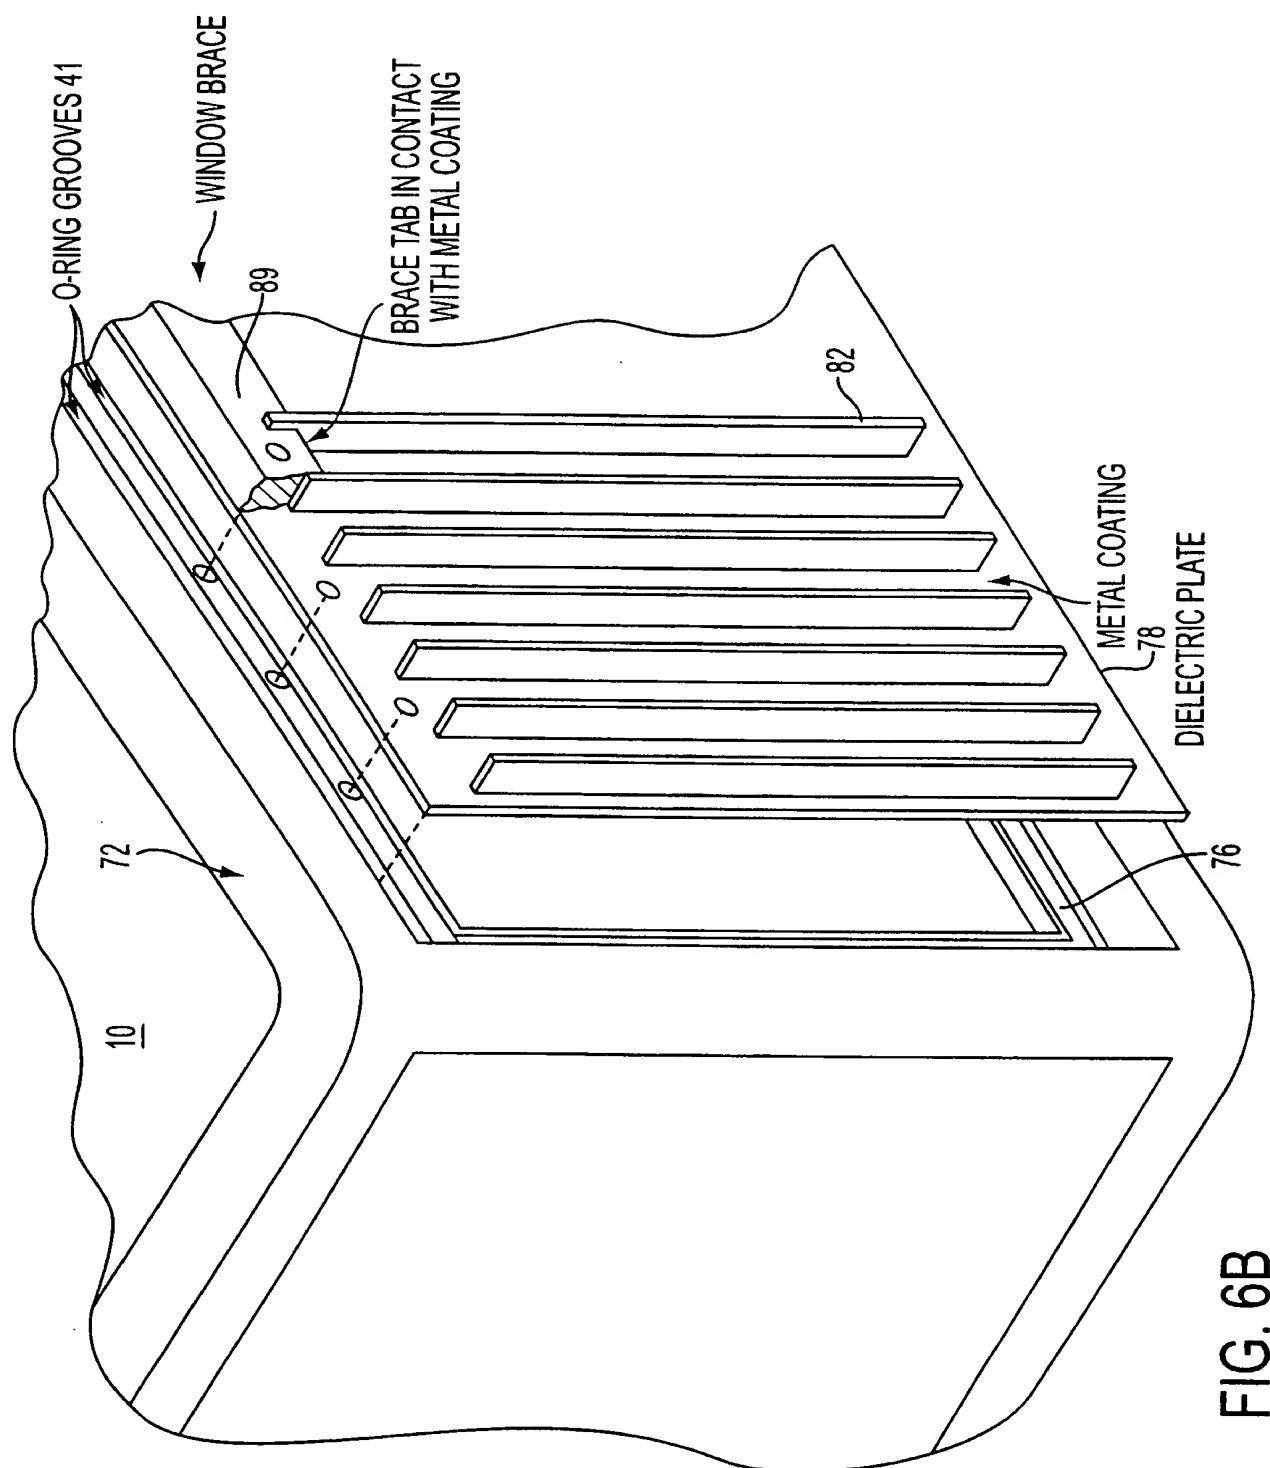


FIG. 6B

8/11

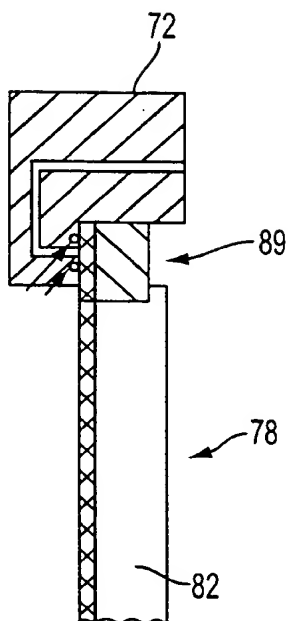


FIG. 6C

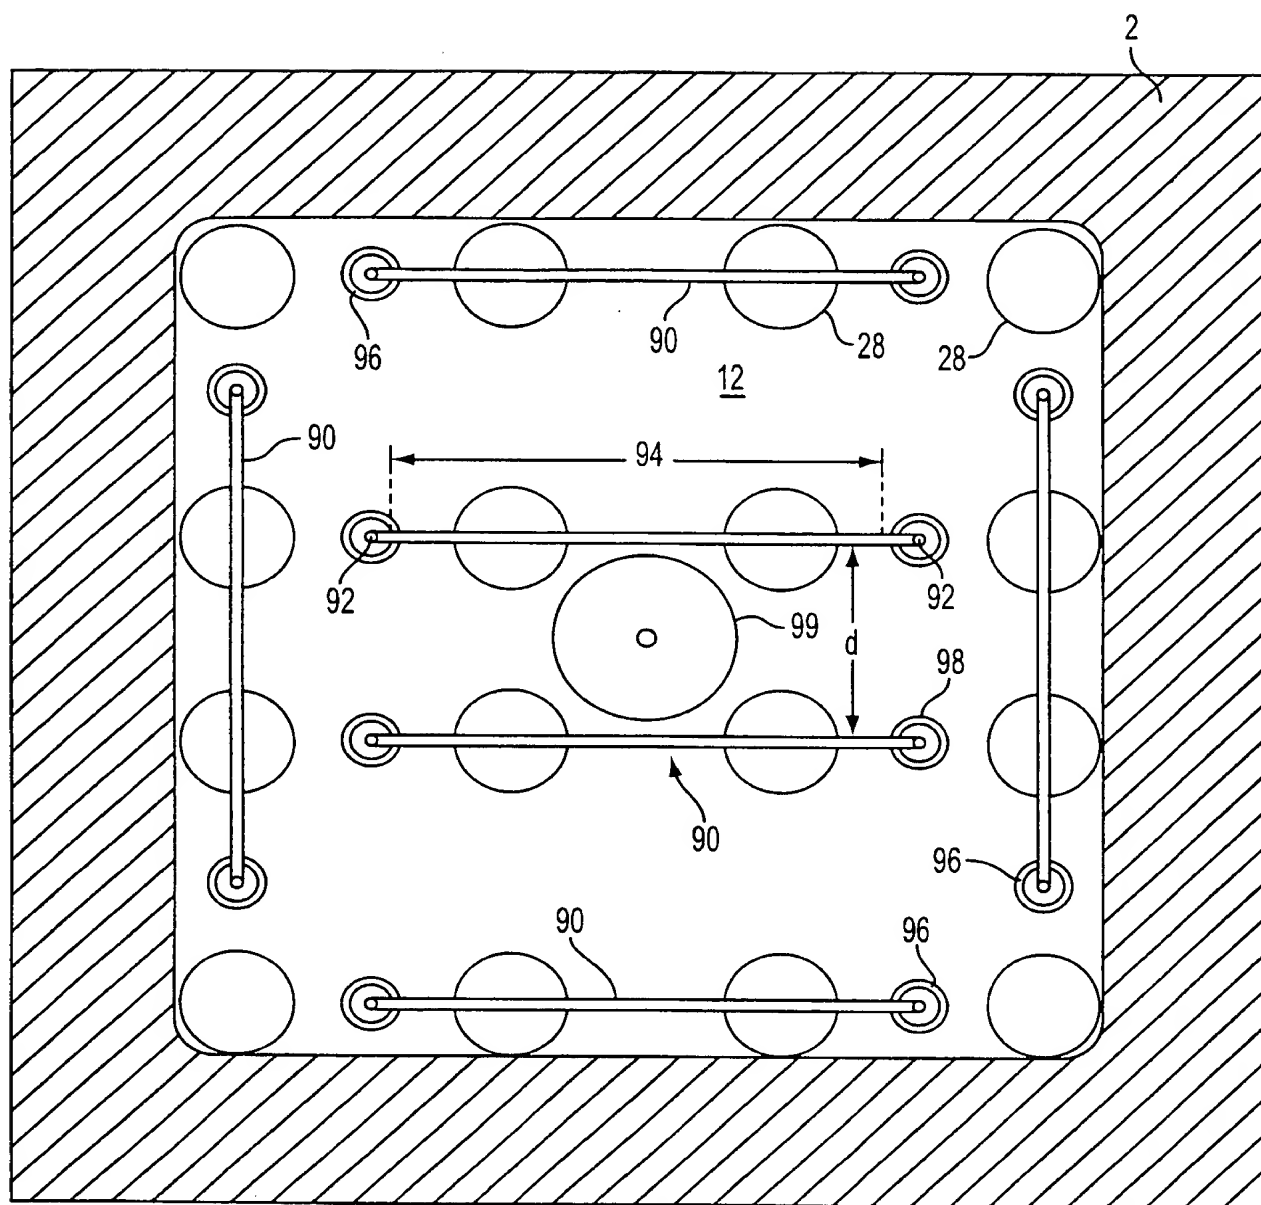


FIG. 7

10/11

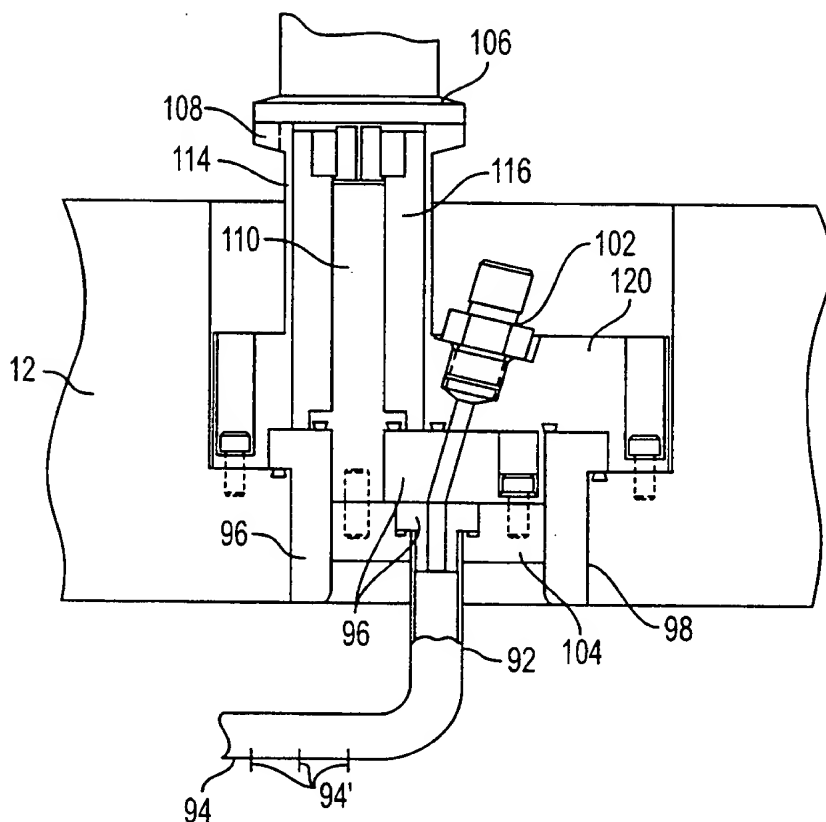


FIG. 8A

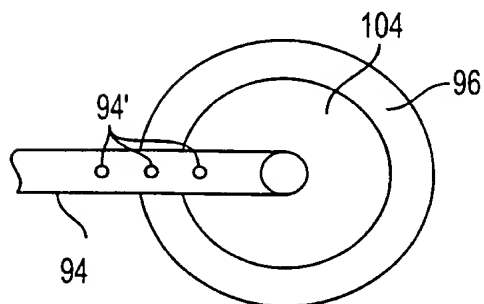


FIG. 8B

11/11

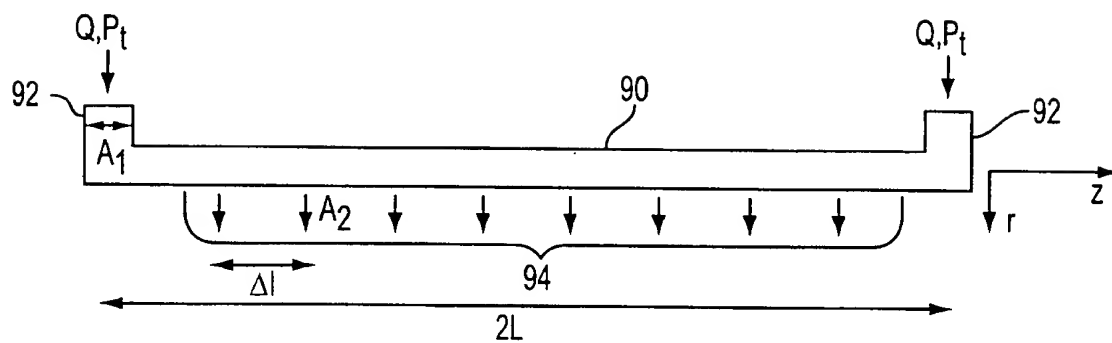


FIG. 9

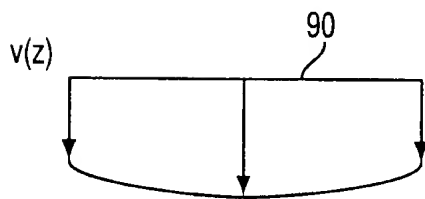
 $B^* \gg 1$

FIG. 10A

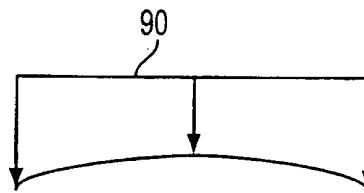
 $B^* \ll 1$

FIG. 10B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/27928

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : C23C 16/00; H01L 21/26, 21/42

US CL : 118/723 I; 438/798

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 118/723 I; 438/798

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,685,941 A (FORSTER et al) 11 November 1997, Fig. 7; abstract; col. 4, lines 13-21	1-17
Y	US 4,277,939 A (HYMAN, JR.) 14 July 1981, Figs. 6-8, col. 5, lines 3-15	1-17
Y	US 5,051,659 A (UHM et al) 24 September 1991, Fig. 1; abstract; col. 2, lines 46-53 and 60-62; col. 3, lines 29-36	1-17
X, P	US 5,883,016 A (CHAN et al) 16 March 1999, col. 5, lines 5-27	1-2, 13-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 MARCH 2000

Date of mailing of the international search report

31 MAR 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ALVA C. POWELL


Telephone No. (703) 308-0661

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

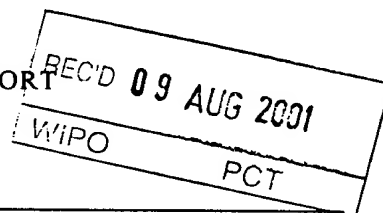

Applicant's or agent's file reference TOKYO23PCT	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/US99/27928	International filing date (day/month/year) 10 DECEMBER 1999	Priority date (day/month/year) 30 DECEMBER 1998
International Patent Classification (IPC) or national classification and IPC IPC(7): C23C 16/00; H01L 21/26, 21/42 and US Cl.: 118/723 I; 438/798		
Applicant TOKYO ELECTRON LIMITED		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 4 sheets.
- ☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority. (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).
- These annexes consist of a total of 0 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of report with regard to novelty, inventive step or industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

RECEIVED
 OCT - 2001
 TECHNOLOGY CENTER 1700

Date of submission of the demand 27 JULY 2000	Date of completion of this report 12 JULY 2001
Name and mailing address of the IPEA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer GREGORY L. MILLS <i>Gregory Mills</i> Telephone No. (703) 308-0661

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US99/27928

I. Basis of the report**1. With regard to the elements of the international application:***☒ the international application as originally filed☒ the description:

pages 1-22 , as originally filed
pages NONE , filed with the demand
pages NONE , filed with the letter of _____

☒ the claims:

pages 23-26 , as originally filed
pages NONE , as amended (together with any statement) under Article 19
pages NONE , filed with the demand
pages NONE , filed with the letter of _____

☒ the drawings:

pages 1-11 , as originally filed
pages NONE , filed with the demand
pages NONE , filed with the letter of _____

☒ the sequence listing part of the description:

pages NONE , as originally filed
pages NONE , filed with the demand
pages NONE , filed with the letter of _____

2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language _____ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
☐ the language of publication of the international application (under Rule 48.3(b)).
☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in printed form.
☐ filed together with the international application in computer readable form.
☐ furnished subsequently to this Authority in written form.
☐ furnished subsequently to this Authority in computer readable form.
☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☒ The amendments have resulted in the cancellation of:

- ☒ the description, pages NONE
☒ the claims, Nos. NONE
☒ the drawings, sheets/fig NONE

5. ☐ This report has been drawn as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

**Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. statement**

Novelty (N)	Claims <u>1-17</u>	YES
	Claims <u>NONE</u>	NO
Inventive Step (IS)	Claims <u>NONE</u>	YES
	Claims <u>1-17</u>	NO
Industrial Applicability (IA)	Claims <u>1-17</u>	YES
	Claims <u>NONE</u>	NO

2. citations and explanations (Rule 70.7)

Claims 1-2 and 10-17 lack an inventive step under PCT Article 33(3) as being obvious over Uhm et al (5,051,659) in view of Chan (5,653,811).

Uhm et al disclose a chamber housing (12) having end walls (14 and 16) enclosing a chamber. (col. 2, lines 40-45). Openings are formed in the end walls (Fig. 1) for the extension of electrical wiring (conductive element) therethrough. The electrical wiring generates a plasma. Mesh grids are used to reflect electrons. The grids are positioned within the housing chamber (12). Referring to Figure 1, a magnetic coil (32) is externally mounted about the housing (12). (col. 3, lines 20-30). The coils (32) are rendered operative when energized by a power supply (34).

Uhm et al do not disclose a plurality of dielectric and sealing members, or a substrate support.

Chan et al disclose a plasma system (Figure 1) for processing large area substrates including a vacuum chamber (14) having a series of dielectric windows (26) hermetically sealed by o-rings (30). (col. 2, lines 30-35). A tube (104) supplies ionizable gas to the vacuum chamber (14).

It would have been obvious to modify the chamber housing of Uhm et al with the dielectric windows and seals of Chan.

The motivation for doing so would have been to maintain the vacuum and uniformity of the plasma process as taught by Chan. (col. 1, lines 15-17).

Therefore, it would have been obvious to combine Uhm et al with Chan. to obtain the invention as specified in claims 1-2 and 12-17.

Claims 3-11 lack an inventive step under PCT Article 33(3) as being obvious over the prior art as applied in the immediately preceding paragraph and further in view of Hyman, Jr. (5,051,659).

Uhm et al and Chan are discussed above.

Uhm et al and Chan do not disclose a polygonal-form chamber housing.

Hyman, Jr. disclose a polygonal-form chamber housing. (Figure 6).

(Continued on Supplemental Sheet.)

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: Boxes I - VIII

Sheet 10

V. 2. REASONED STATEMENTS - CITATIONS AND EXPLANATIONS (Continued):

It would have been obvious to modify the chamber housing of Uhm et al and Chan with the polygonal-form housing of Hyman, Jr.

The motivation for doing so would have been to provide a plasma whose intensity is less peaked at the center as taught by Hyman, Jr. (col. 5, lines 25-30).

Therefore, it would have been obvious to combine Uhm et al with Chan and Hyman, Jr. to obtain the invention as specified in claims 3-11.

----- NEW CITATIONS -----

US 5,653,811 A (Chan) 5 AUGUST 1997, column 2, lines 30-60

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/27928

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : C23C 16/00; H01L 21/26, 21/42

US CL : 118/723 I; 438/798

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 118/723 I; 438/798

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,685,941 A (FORSTER et al) 11 November 1997, Fig. 7; abstract; col. 4, lines 13-21	1-17
Y	US 4,277,939 A (HYMAN, JR.) 14 July 1981, Figs. 6-8, col. 5, lines 3-15	1-17
Y	US 5,051,659 A (UHM et al) 24 September 1991, Fig. 1; abstract; col. 2, lines 46-53 and 60-62; col. 3, lines 29-36	1-17
X, P	US 5,883,016 A (CHAN et al) 16 March 1999, col. 5, lines 5-27	1-2, 13-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 MARCH 2000

Date of mailing of the international search report

31 MAR 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ALVA C. POWELL

Telephone No. (703) 308-0661